


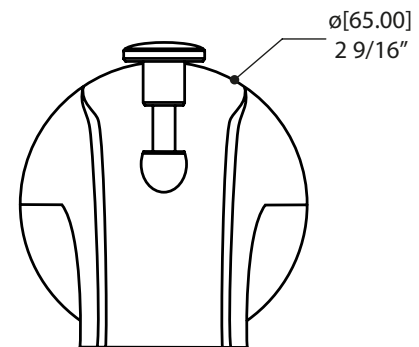
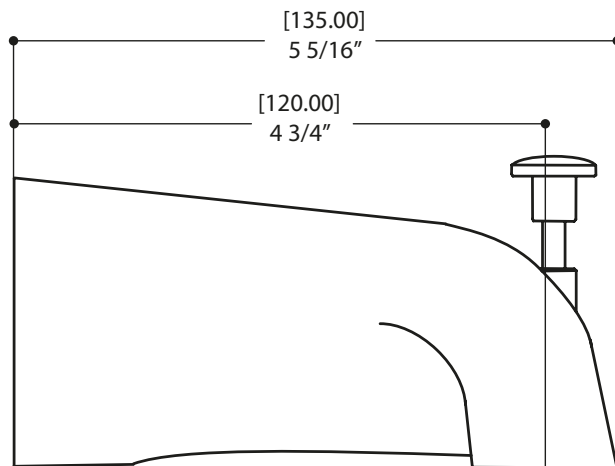
# LIV60330

## Robinet de salle de bain Bathroom faucet



### SPÉCIFICATIONS | SPECIFICATIONS

<b>CARACTÉRISTIQUES</b>	bec rond de 5 5/16" Connection 1/2 sans filet (slip-fit)
<b>CHARACTERISTICS</b>	5 5/16" round spout Pull-button diverter 1/2" slip-fit inlet
<b>FINITION FINISH</b>	Chrome poli et Noir mat Polished chrome & Matte black
<b>CERTIFICATION</b>	 C <sup>®</sup>



#### GARANTIE LIMITÉE DE LIV Fixtures

Le produit est garanti contre les défauts de matériaux et de fabrications. Cette garantie sera en vigueur seulement si le robinet de salle de bain a été utilisé conformément à son usage prévu. Le produit doit être utilisé dans un environnement résidentiel normal. La garantie limitée n'est pas transférable à un tiers. La garantie limitée peut comporter d'autres conditions et exclusions qui ne sont pas mentionnées. Il est donc recommandé de consulter la documentation officielle de garantie fournie par LIV.

#### LIV Fixtures LIMITED WARRANTY

The product is guaranteed against defects materials and manufacturing. This warranty will only be in effect if the bathroom faucet has been used for its intended purpose. The product should be used in a normal residential environment. The limited warranty is not transferable to any third party. The limited warranty may contain other conditions and exclusions which are not stated. It is therefore recommended to consult the official warranty documentation provided by LIV.



livfixtures.ca







-FIXTURES-

# EVA90660

Robinet de lavabo  
Lavatory faucet



## SPÉCIFICATIONS | SPECIFICATIONS


<b>CARACTÉRISTIQUES</b>	Mitigeur monocommande Cartouche en céramique Laiton massif Drain pop-up à pression avec trop plein inclus Connections 3/8" boyaux SOFTPEX de Neoperl® Débit réduit économisant l'eau : 1.5 gpm (5.7 L/min)
<b>CHARACTERISTICS</b>	Single-control lever Ceramic cartridge Solid brass Press pop-up drain with overflow included 3/8" SOFTPEX hoses by Neoperl Reduced water-efficient flow: 1.5 gpm (5.7 L/min)
<b>FINITION FINISH</b>	Chrome poli et Noir mat Polished chrome & Matte black
<b>PROJECTION TOTALE DU BEC TOTAL SPOUT PROJECTION</b>	5 11/16"
<b>PROJECTION CC DU BEC CC SPOUT PROJECTION</b>	4 1/4"
<b>HAUTEUR TOTALE TOTAL HEIGHT</b>	6 5/16"
<b>DÉBIT FLOW RATE</b>	1.5 gpm (5.7 L/min)
<b>PERÇAGE MOUNTING HOLE</b>	1 3/8"
<b>ÉPAISSEUR COMPTOIR COUNTER DEPTH</b>	1 1/2" max
<b>CERTIFICATION</b>	   

**LiV**

-FIXTURES-

# EVA90660

## Robinet de lavabo Lavatory faucet

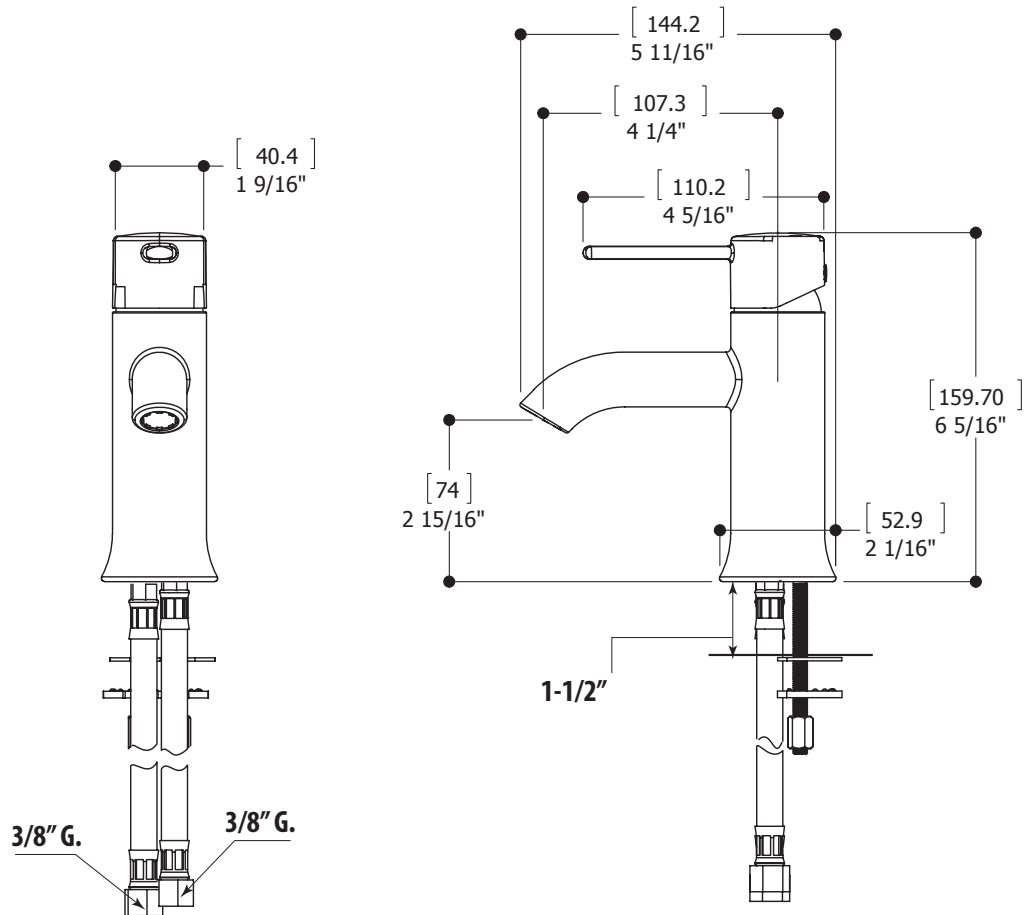

### GARANTIE LIMITÉE DE LIV Fixtures

Le produit est garanti contre les défauts de matériaux et de fabrications. Cette garantie sera en vigueur seulement si le robinet de salle de bain a été utilisé conformément à son usage prévu. Le produit doit être utilisé dans un environnement résidentiel normal. La garantie limitée n'est pas transférable à un tiers. La garantie limitée peut comporter d'autres conditions et exclusions qui ne sont pas mentionnées. Il est donc recommandé de consulter la documentation officielle de garantie fournie par LIV.

### LIV Fixtures LIMITED WARRANTY

The product is guaranteed against defects materials and manufacturing. This warranty will only be in effect if the bathroom faucet has been used for its intended purpose. The product should be used in a normal residential environment. The limited warranty is not transferable to any third party. The limited warranty may contain other conditions and exclusions which are not stated. It is therefore recommended to consult the official warranty documentation provided by LIV.



livfixtures.ca

# EVA90670

Robinet de lavabo monotrou  
Single hole Lavatory faucet



## SPÉCIFICATIONS | SPECIFICATIONS

Projection CC du bec CC spout projection	4 1/2"
Projection totale du bec Total spout projection	5 3/4"
Hauteur totale Total height	13,88"

### CARACTÉRISTIQUES / CHARACTERISTICS

Nickel brossé  
Brushed nickel

Robinet en laiton robuste  
Robust brass faucet

Mitigeur monocommande  
Single control lever

Cartouche de céramique  
Ceramic cartridge

1.2 gpm (4.5 L/min)

Débit  
Flow

### CERTIFICATION



**LiV**

-FIXTURES-

